

Operating Instructions

Includes: TorchLyte™ Head Unit, (1) Rechargeable Post & Charger
Remote Controllers and base stand sold separately


Charging Instructions:

1. Keep the Rechargeable Post plugged into the charging power source when stored.
2. TorchLyte™ should be "Off" when charging, Charge time is approximately 4 hours.
3. Turn "Off" TorchLyte™ power switch when not being used longer than 3 days.
4. Rechargeable Post should be recharged every 3 months when stored.
5. Charger Input Voltage 100—240VAC.

Operating Time: 35hrs+ in Flame mode and 14 hrs. at maximum brightness White color.

Remote Control Operation: (unlimited number of TorchLyte Lamps can be controlled)
 Default mode with Power Switch is Flickering Flame Mode.

- **On** – Turns on the TorchLyte™, recalls last operating mode and color.
- **Off** – Turns off the TorchLyte™ from any mode. (Lamp still uses standby battery power when in remote control "Off" mode)
- **Timer** - Will automatically turn off the TorchLyte™ after 4 or 8 Hrs. Press Timer instead of the On button to activate timer mode. Cancel timer anytime with **Off** button.
- **Brightness UP/DN** ☀️ ☀️ Brightness level is controlled with "Sun" icons
- **Candle**—Selects the Flame mode.
- **Light**—Selects a steady non-changing white light.
Full Remote Controller Only
- **Color Buttons** – Selects predetermined individual colors with one button press.
- **Smooth** - Rotates through the full-spectrum color pallet over a 10 minute period.
- **Flash** – Rotates through rainbow color pallet over a 8 second period.

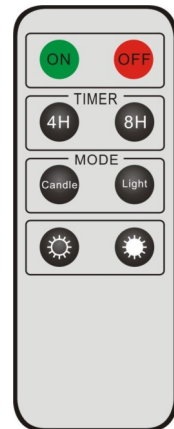

Simple Remote

Touch Switch Operation

Tap Touch button to scroll through the selections:

Flame > White > Red > Green > Pink > Teal > Blue > Purple > Flash > Scroll
 Touch & Hold Touch button for 1 second to rotate through 3 Brightness levels
 Touch & Hold Touch button for 2 seconds to turn Lamp OFF or ON.

Battery Level Mode

To read battery level, press Off then press Dim. Lamp will light for 2 secs. Green - Good, Yellow - time to recharge, Red - Low

Battery Low Indicator

Lamp will slowly pulse center LED Red when battery is too low to operate.
 Recharge immediately to preserve battery life.

Important: Failure to follow these instructions will void the warranty.

1. TorchLyte™ must be fully charged before use.
2. Only use Charger provided with the system. Using another power supply will permanently damage the Rechargeable battery
3. When the Red LED Low Battery indicator is pulsing the TorchLyte™ should be fully recharged.
4. The TorchLyte™ can remain on the smart charge continually when in use or not to maintain a trickle charge and maintain batteries useful life.
5. Store the TorchLyte™ System in a cool dry area.
6. The TorchLyte charger is NOT water resistant, liquid WILL cause failure.



TorchLyte™
Full Remote